



SKYLIGHT:

MODEL SF SELF CURBING SKYLIGHT

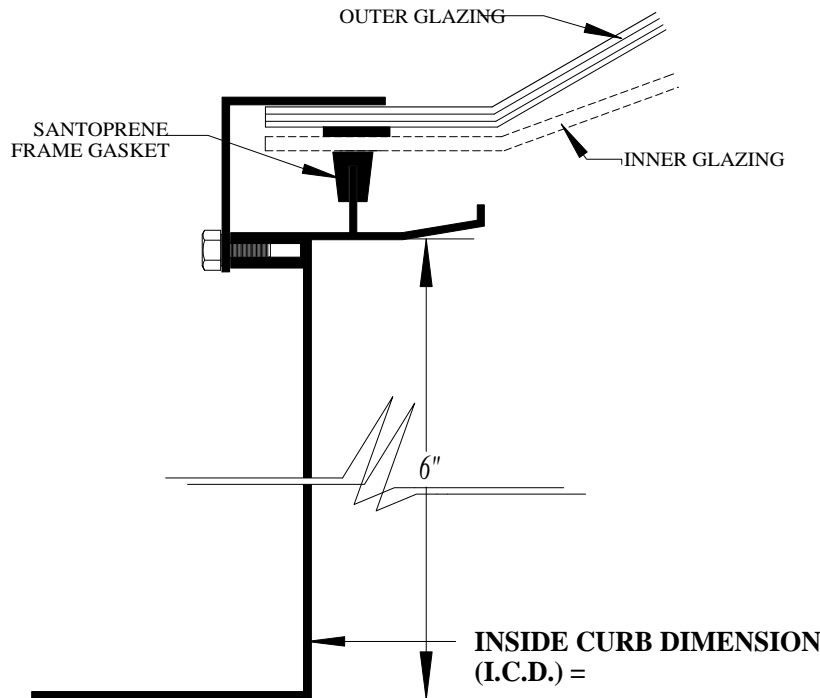

TYPICAL CURB DETAIL

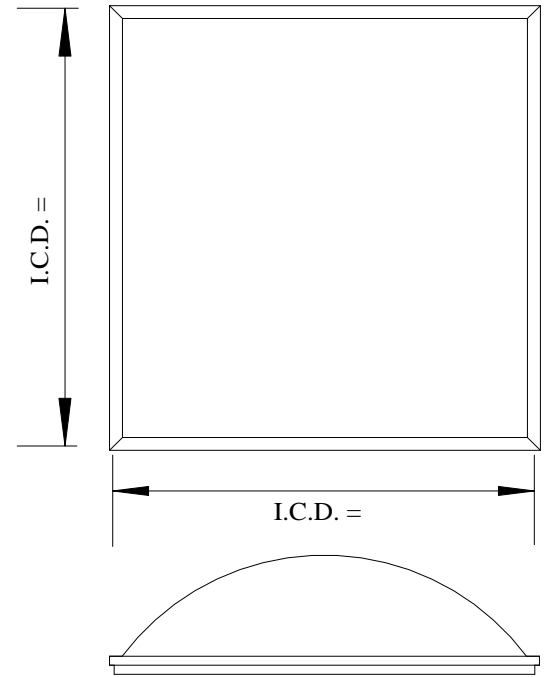

Units to be assembled on a .063" extruded aluminum curb frame which provides for condensate captivation and capillary break. Gaskets shall be Santoprene. Aluminum retaining frame to be .063" thick. All corners shall be welded. Roof flashing (not by SCI). Glazing shall meet or exceed minimum thickness specified by AAMA 1601-93.

SPECIFICATION AND DATA SHEET

ALUMINUM FINISH

- MILL (STANDARD)
- WHITE PAINTED
- BRONZE PAINTED
- OTHER _____

GLAZING MATERIALS

DOME COLOR	OUTER	INNER
CLEAR	<input type="checkbox"/>	<input type="checkbox"/>
WHITE	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	<input type="checkbox"/>	<input type="checkbox"/>
OTHER _____	<input type="checkbox"/>	<input type="checkbox"/>
DOME MATERIAL		
ACRYLIC	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE XL	<input type="checkbox"/>	<input type="checkbox"/>

CUSTOMER: _____

PROJECT NAME: _____

SUBMITTAL DATE: _____

APPROVED BY: _____

APPROVAL DATE: _____

MODEL: _____

QUANTITY REQ'D: _____

SKYLIGHT CONCEPTS, INC.

3400 NW 26TH TER FT. LAUDERDALE, FL 33312

PHONE (954) 776-7616

FAX (954) 772-1915