



REPLACEMENT DOME CHECK LIST AND INFORMATION

Measuring


Measure the dome material only, frame dimensions are not needed.

- A. overall dimension
- B. dome height
- C. flange width
- D. material thickness


- E. quantity
- F. type of material
- G. color

- A. "X"
- B. _____
- C. _____
- D. _____
- E. _____
- F. _____
- G. _____

Gradual Slope Style

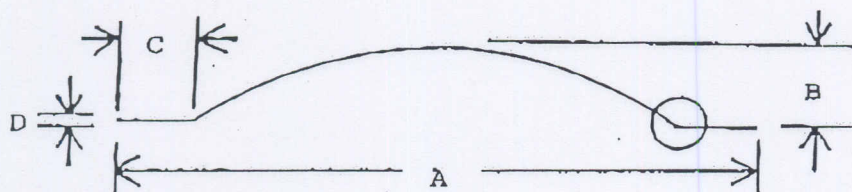

SHAP RISE STYLE IS NOT AVAILABLE, CALL FOR OTHER OPTIONS.

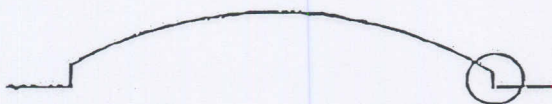

INSTALLATION:

Disassemble unit by removing hex head screws around perimeter of the top aluminum retaining angle and remove angle. Separate the domes with a box knife (or any sharp object). Discard broken dome; the clean the perimeter surface of the domes. Set the bottom dome onto skylight frame and apply a small bead of silicone (GE or Dow brand) to the top side of the perimeter surface. Then set the upper dome on top of the lower dome and replace and re-anchor the aluminum retaining angle snugly.

CLEANING:

Wash domes with a mild soap or detergent and plenty of lukewarm water. Use a soft cloth, applying only light pressure. Rinse with clear water and dry by blotting with a damp cloth or chamois.

DO NOT USE: Window cleaning sprays, kitchen scouring compounds, alcohol, or solvents such as acetone, gasoline, benzene, carbon tetrachloride or lacquer thinner. These chemicals can destroy acrylic dome material.