
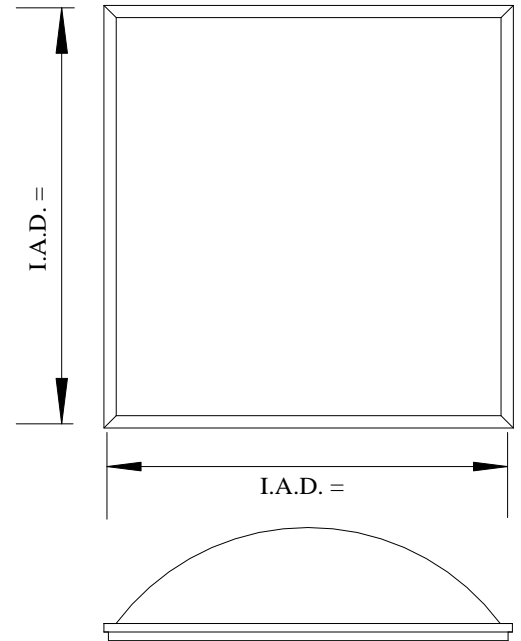


SKYLIGHT:

MODEL CMDADE IMPACT RESISTANT CURB MOUNTED SKYLIGHT

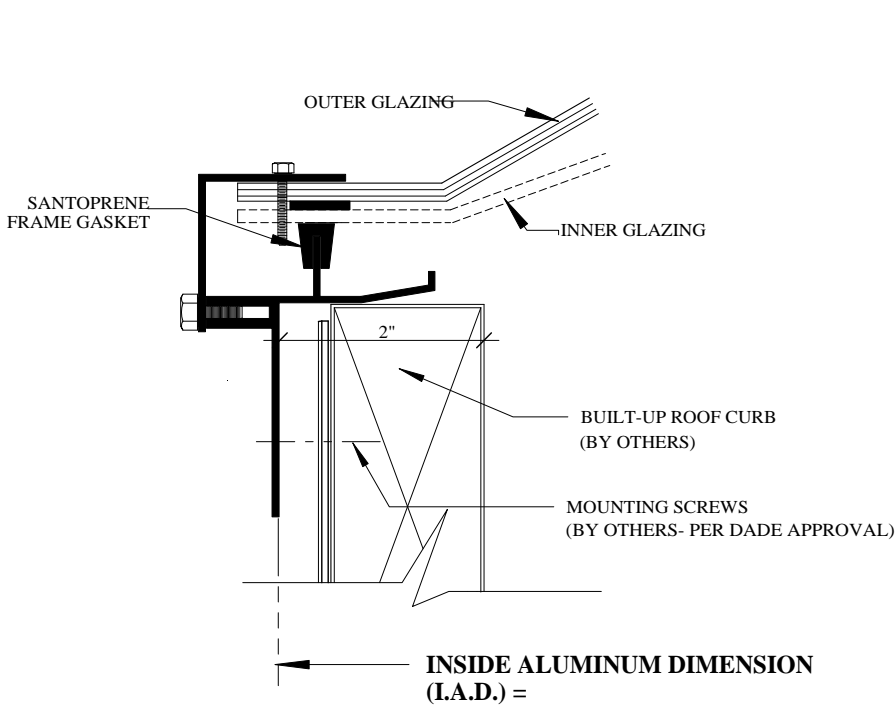

TYPICAL CURB DETAIL

Units to be assembled on a .063" extruded aluminum curb frame which provides for condensate captivation and capillary break. Gaskets shall be Santoprene. Aluminum retaining frame to be .063" thick. All corners shall be welded. The roof mounting curb (not by SCI) shall be 1.5" wide min. (nominal 2"). Flashing (not by SCI). Glazing shall meet or exceed minimum thickness specified by AAMA 1601-93. Metro-Dade Acceptance # 08-0117.02

SPECIFICATION AND DATA SHEET

ALUMINUM FINISH

- MILL (STANDARD)
- WHITE PAINTED
- BRONZE PAINTED
- OTHER _____

GLAZING MATERIALS

DOME COLOR	OUTER	INNER
CLEAR	<input type="checkbox"/>	<input type="checkbox"/>
WHITE	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	<input type="checkbox"/>	<input type="checkbox"/>
OTHER _____	<input type="checkbox"/>	<input type="checkbox"/>
DOME MATERIAL		
ACRYLIC	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE XL	<input type="checkbox"/>	<input type="checkbox"/>

CUSTOMER: _____

PROJECT NAME: _____

SUBMITTAL DATE: _____

APPROVED BY: _____

APPROVAL DATE: _____

MODEL: _____

QUANTITY REQ'D: _____

C:\STANDARDS\CMDADE.CAD

SKYLIGHT CONCEPTS, INC.

3400 SW 26TH TERRACE, A6 FT. LAUDERDALE, FL 33312

PHONE (954) 776-7616

FAX (954) 772-1915