
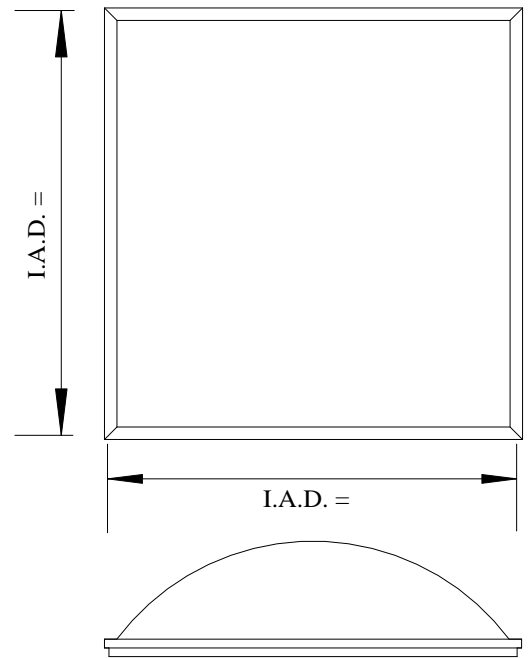


# SKYLIGHT: MODEL CM CURB MOUNTED SKYLIGHT

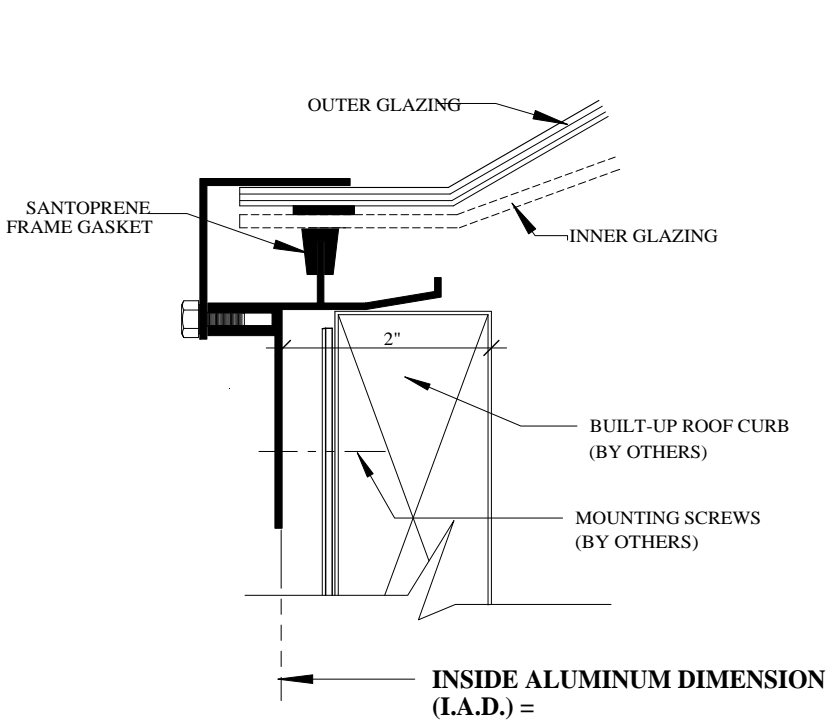

## TYPICAL CURB DETAIL

Units to be assembled on a .063" extruded aluminum curb frame which provides for condensate captivation and capillary break. Gaskets shall be Santoprene. Aluminum retaining frame to be .063" thick. All corners shall be welded. The roof mounting curb (not by SCI) shall be 1.5" wide min. (nominal 2"). Flashing (not by SCI). Glazing shall meet or exceed minimum thickness specified by AAMA 1601-93.

## **SPECIFICATION AND DATA SHEET**

### ALUMINUM FINISH

- MILL (STANDARD)
- WHITE PAINTED
- BRONZE PAINTED
- OTHER \_\_\_\_\_

### GLAZING MATERIALS

DOME COLOR	OUTER	INNER
CLEAR	<input type="checkbox"/>	<input type="checkbox"/>
WHITE	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	<input type="checkbox"/>	<input type="checkbox"/>
OTHER _____	<input type="checkbox"/>	<input type="checkbox"/>
DOME MATERIAL		
ACRYLIC	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE	<input type="checkbox"/>	<input type="checkbox"/>
POLYCARBONATE XL	<input type="checkbox"/>	<input type="checkbox"/>

CUSTOMER: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

SUBMITTAL DATE: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

APPROVAL DATE: \_\_\_\_\_

MODEL: \_\_\_\_\_

QUANTITY REQ'D: \_\_\_\_\_

C:\STANDARDS\CMDADE.CAD

### SKYLIGHT CONCEPTS, INC.

3400 SW 26 TER FT. LAUDERDALE, FL 33312

PHONE (954) 776-7616

FAX (954) 772-1915